


+Tap

+WDM

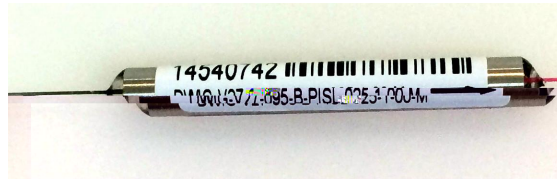

-
-
-
-
-

- Telcordia GR-1221-CORE
- RoHS

		nm	980/1550	
(λs)		nm	1528~1569	
(λp)		nm	965~990	
		dB	≤1.5	≤1.6
		dB	≤0.8	≤0.8
Peak to Peak Error Function		dB	≤0.6	
	Signal to Com@λs	dB	≥21	≥36
	Com to Signal@λp	dB	≥20	
	Pump1 to Com@λs	dB	≥18	
	Pump2 to Signal@λs	dB	≥50	

	dB	≥45
	dB	≤0.2
	ps	≤0.05(Low PMD), ≤0.10(Normal)
	dB	≥50
	mw	≤300
		-5~+70
		-40~+85
	mm	Φ3.5*29
		OFS980-16

DWIG- □-□-□-□-□-□-□-**M**

Connectors: FC/UPC,SC/UPC,LC/UPC,00:No Connector

Fiber Length:1 1.0m; customer specify

Fiber Dia.:09 Φ0.9mm 0-