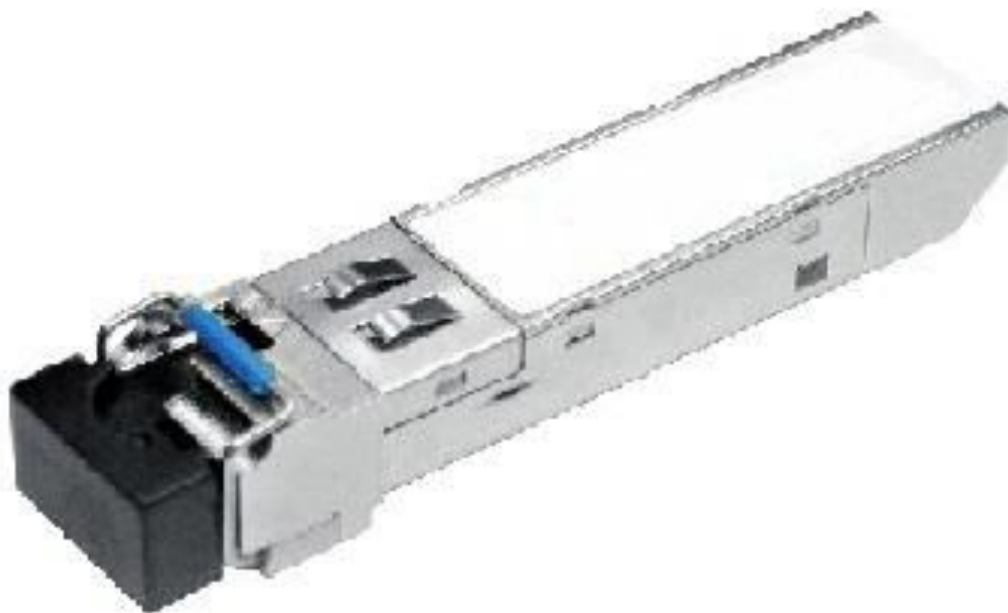


RTXM182-405

RTXM182-406

155Mb/s LC

SFP

PIN

EEPROM

- LC
- 3.3V
- 155Mb/s
- PECL
-
- 15
- : 0°C ~+70°C
- RoHS

-
-
-

- SFP MSA (INF-8074i)
- IEEE802.3ah
- ITU-T G.957

参数	符号	单位	最小	典型	最大	备注
	Icc	mA	-	-	300	1
		mV	150	-	1100	
		mV	300	-	600	
TX_fault /LOS (TTL)	VOH	V	2.0	-	Vcc	
	VOL	V	0	-	0.8	
TX_disable (TTL)	VOH	V	2.0	-	Vcc	
	VOL	V	0	-	0.8	
155M BIDI SFP						
	Po	dBm	-14		-8	EOL
	λ_c	nm	1260	1310	1360	FP-LD
			1480	1550	1580	FP-LD
	EX	dB	10			
(RMS)	$\Delta\lambda$	nm			4.6	1310nmFP-LD
(RMS)	$\Delta\lambda$	nm			3	1550nmFP-LD
	Tp-p	ns			1	2
	RIN	dB/Hz			-116	
ITU-T STM1						
	Poff	dBm	-	-	-45	
	λ_c	nm	1480		1580	
			1260		1360	
	S	dBm			-29	
	Pin	dBm	-7			
		dB			-30	
			-43			
		dB	0.5		5	
		dB			1	

备注 1.

备注 2. 155Mbps 23

型号	规格								应用
RTXM182-405	SFP	155M	1310nm FP-LD	-14~-8 dBm	PIN 1550nm	< -29dBm	0~70℃	15km	STM1 FE
RTXM182-406	SFP	155M	1550nm FP-LD	-14~-8 dBm	PIN 1310nm	< -29dBm	0~70℃	15km	STM1 FE

